

# SP Correias - Peças Sincronizadoras



11 3455-5872  
www.spcorreias.com.br



## Polias Sincronizadoras - T5

Passo de 5,0 mm (Padronizada) – Dentes trapezoidais

Para correias de largura de 8,0 mm

Referência	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	ØP Furo Min.	ØP Furo Máx.	ØC Cubo	8			Material
								L1	L2*	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	12,5	18,5	3,3	AL
12 T5	12	6F	19,10	23	4	6	12	12,5	18,5	5,5	AL
14 T5	14	6F	22,29	26	6	8	14	12,5	18,5	6,5	AL
15 T5	15	6F	23,88	28	6	8	16	12,5	18,5	7,7	AL
16 T5	16	6F	25,47	30	6	10	16	12,5	18,5	9,0	AL
18 T5	18	6F	28,65	33	6	12	20	12,5	18,5	10,0	AL
19 T6	19	6F	30,25	34	6	14	20	12,5	18,5	11,0	AL
20 T5	20	6F	31,83	38	6	14	20	12,5	18,5	1	AL
24 T5	24	6F	38,21	42	6	14	25	12,5	18,5	14,0	AL
25 T5	25	6F	39,80	43	6	16	25	12,5	18,5	14,0	AL
27 T5	27	6F	42,98	47	8	16	30	12,5	18,5	18,0	AL
30 T5	30	6F	47,76	61	8	18	34	12,5	18,5	20,0	AL
32 T5	32	6F	50,94	55	8	18	38	12,5	18,5	26,0	AL
36 T5	36	6F	57,31	61	8	25	40	12,5	18,5	38,0	AL
40 T5	40	6F	63,66	87	8	25	42	12,5	18,5	47,0	AL
48 T5	48	6F	76,42	---	8	30	50	13,0	19,0	62,0	AL
60 T5	60	6F	95,52	---	10	35	55	13,0	19,0	80,0	AL
72 T5	72	6F	114,59	---	10	40	55	13,0	19,0	120,0	AL

Para correias de largura de 10,0 mm

Para correias de largura de 12,0 mm

Referência	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	ØP Furo Min.	ØP Furo Máx.	ØC Cubo	10			12			Material
								L1	L2*	Peso (g)	L1	L2*	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	14,5	20,5	7,0	16,5	23,0	7,5	AL
12 T5	12	6F	19,10	23	4	6	12	14,5	20,5	8,0	16,5	23,0	8,5	AL
14 T5	14	6F	22,29	26	6	8	14	14,5	20,5	9,0	16,5	23,0	9,5	AL
15 T5	15	6F	23,88	28	6	8	16	14,5	20,5	10,0	16,5	23,0	10,5	AL
16 T5	16	6F	25,47	30	6	10	16	14,5	20,5	11,0	16,5	23,0	12,0	AL
18 T5	18	6F	28,65	33	6	12	20	14,5	20,5	12,0	16,5	23,0	13,0	AL
19 T6	19	6F	30,25	34	6	14	20	14,5	20,5	14,0	16,5	23,0	15,0	AL
20 T5	20	6F	31,83	38	6	14	20	14,5	20,5	15,0	16,5	23,0	17,0	AL
24 T5	24	6F	38,21	42	6	14	25	14,5	20,5	20,0	16,5	23,0	21,0	AL
25 T5	25	6F	39,80	43	6	16	25	14,5	20,5	21,0	16,5	23,0	22,0	AL
27 T5	27	6F	42,98	47	8	16	30	14,5	20,5	30,0	16,5	23,0	36,0	AL
30 T5	30	6F	47,76	61	8	18	34	14,5	20,5	40,0	16,5	23,0	54,0	AL
32 T5	32	6F	50,94	55	8	18	38	14,5	20,5	50,0	16,5	23,0	62,0	AL
36 T5	36	6F	57,31	61	8	25	40	14,5	20,5	60,0	16,5	23,0	70,0	AL
40 T5	40	6F	63,66	67	8	25	42	14,5	20,5	70,0	16,5	23,0	80,0	AL
48 T5	48	6F	76,42	---	8	30	50	14,5	20,5	80,0	16,5	23,0	100,0	AL
60 T5	60	6F	95,52	---	10	35	55	14,5	20,5	100,0	16,5	23,0	125,0	AL
72 T5	72	6F	114,59	---	10	40	55	14,5	20,5	140,0	16,5	23,0	180,0	AL

# SP Correias - Peças Sincronizadoras

11 3455-5872

www.spcorreias.com.br



## Polias Sincronizadoras - T5

Passo de 5,0 mm (Padronizada) – Dentes trapezoidais

Para correias de largura de 16,0 mm

Para correias de largura de 20,0 mm


Referência	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	ØP Furo Min.	ØP Furo Máx.	ØC Cubo	16			20			Material
								L1	L2*	Peso (g)	L1	L2*	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	20,5	27,0	8,0	26,0	32,0	9,0	AL
12 T5	12	6F	19,10	23	4	6	12	20,5	27,0	9,0	26,0	32,0	10,0	AL
14 T5	14	6F	22,29	26	6	8	14	20,5	27,0	10,0	26,0	32,0	11,0	AL
15 T5	15	6F	23,88	28	6	8	16	20,5	27,0	11,0	26,0	32,0	12,0	AL
16 T5	16	6F	25,47	30	6	10	16	20,5	27,0	12,0	26,0	32,0	14,0	AL
18 T5	18	6F	28,65	33	6	12	20	20,5	27,0	14,0	26,0	32,0	17,0	AL
19 T6	19	6F	30,25	34	6	14	20	20,5	27,0	17,0	26,0	32,0	18,0	AL
20 T5	20	6F	31,83	38	6	14	20	20,5	27,0	18,0	26,0	32,0	19,0	AL
24 T5	24	6F	38,21	42	6	14	25	20,5	27,0	25,0	26,0	32,0	28,0	AL
25 T5	25	6F	39,80	43	6	16	25	20,5	27,0	26,0	26,0	32,0	30,0	AL
27 T5	27	6F	42,98	47	8	16	30	20,5	27,0	40,0	26,0	32,0	43,0	AL
30 T5	30	6F	47,76	51	8	18	34	20,5	27,0	56,0	26,0	32,0	59,0	AL
32 T5	32	6F	50,94	55	8	18	38	20,5	27,0	69,0	26,0	32,0	71,0	AL
36 T5	36	6F	57,31	61	8	25	40	20,5	27,0	98,0	26,0	32,0	100,0	AL
40 T5	40	6F	63,66	67	8	25	42	20,5	27,0	100,0	26,0	32,0	122,0	AL
48 T5	48	6	76,42	---	8	30	50	21,0	28,0	120,0	26,0	32,0	130,0	AL
60 T5	60	6	95,52	---	10	35	55	21,0	28,0	140,0	26,0	32,0	180,0	AL
72 T5	72	6	114,59	---	10	40	55	21,0	28,0	200,0	26,0	32,0	255,0	AL

Para correias de largura de 25,0 mm

Referência	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	ØP Furo Min.	ØP Furo Máx.	ØC Cubo	25			Material
								L1	L2*	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	31,0	38,0	10,0	AL
12 T5	12	6F	19,10	23	4	6	12	31,0	38,0	11,0	AL
14 T5	14	6F	22,29	26	6	8	14	31,0	38,0	12,0	AL
15 T5	15	6F	23,88	28	6	8	16	31,0	38,0	14,0	AL
16 T5	16	6F	25,47	30	6	10	16	31,0	38,0	16,0	AL
18 T5	18	6F	28,65	33	6	12	20	31,0	38,0	18,0	AL
19 T6	19	6F	30,25	34	6	14	20	31,0	38,0	19,0	AL
20 T5	20	6F	31,83	38	6	14	20	31,0	38,0	22,0	AL
24 T5	24	6F	38,21	42	6	14	25	31,0	38,0	35,0	AL
25 T5	25	6F	39,80	43	6	16	25	31,0	38,0	40,0	AL
27 T5	27	6F	42,98	47	8	16	30	31,0	38,0	54,0	AL
30 T5	30	6F	47,76	51	8	18	34	31,0	38,0	63,0	AL
32 T5	32	6F	50,94	55	8	18	38	31,0	38,0	78,0	AL
36 T5	36	6F	57,31	61	8	25	40	31,0	38,0	110,0	AL
40 T5	40	6F	63,66	67	8	25	42	31,0	38,0	135,0	AL
48 T5	48	6F	76,42	---	8	30	50	31,0	38,0	140,0	AL
60 T5	60	6F	95,52	---	10	35	55	31,0	38,0	218,0	AL
72 T5	72	6F	114,59	---	10	40	55	31,0	38,0	260,0	AL

### Legenda

- 6 = sem flange, maciça
- 6 F = com flange, maciça
- L 1 = largura sem cubo
- L 2 = largura total com o cubo

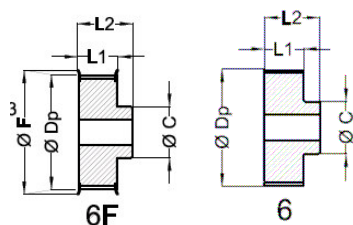

Ex. Polia 20 T5 25  
 20 = N.º de dentes  
 T5 = passo da polia  
 25 = P/ correia de 25mm de largura